



DEWMARK HEAVY

SV 42/50/N

Aluminium profile - Surface fixing

- Long service lifetime
- Attractive appearance
- Joint width 50 mm
- Total Movement 10 mm
- Movement in three directions



Technical Information

Profile	Joint width, F (mm)	Installation height, H (mm)	Visible width of profile, S (mm)	Overall width of profile, Sm (mm)	Horizontal movement, ΔF (mm)	Vertical movement, ΔFh (mm)	Allowable loads, kN			
SV 42/50/N	50	31	190	190	10 (+5/-5)	10 (+5/-5)	50 ¹	100 ¹	70 ¹	—

Corner version (joint along wall)

SV-E 42/50/N	50	31	120	120	10 (+5/-5)	10 (+5/-5)	Pedestrian			
--------------	----	----	-----	-----	------------	------------	------------	--	--	--

Material: Aluminium 6060


Color: Aluminium

Standard length: 3 meters

On order : Anodization, wood grain decorating

¹ To be approved

Installation: Roughnesses of a surface on which the profile is fixed have to be eliminated by MAPEGROUT leveling solution or similar. Aluminum profiles have to be installed on both sides of a joint and are snugged by anchors, regarding the recommendations about the choice of a fixture. For simplification of installation of an insert please use WD-40 lubricant (or an analog). Follow recommendations about installation from the brochure "Selection and installation of the Dewmark profiles. General recommendations".

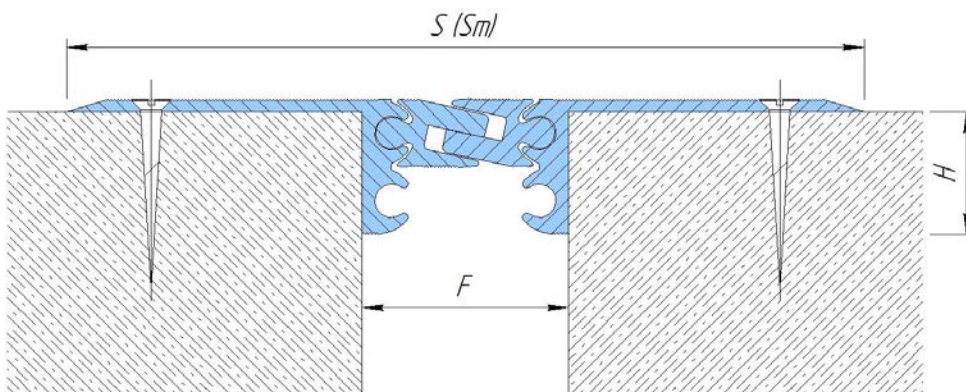

SV 42/50/N

