



# DEWMARK HEAVY

## SV 43/35/...

### Aluminium profile

- Long service lifetime
- Attractive appearance
- For ultra-heavy loads
- Joint width up to 35 mm
- Total Movement 10 mm
- Movement in three directions



### Technical Information

Profile	Joint width, F (mm)	Joint height, H (mm)	Visible width of profile, S (mm)	Overall width of profile, Sm (mm)	Horizontal movement, $\Delta F$ (mm)	Vertical movement, $\Delta Fh$ (mm)	Allowable loads, kN			
SV 43/35/34	35	34	50	170	10 (+5/-5)	10 (+5/-5)	50 <sup>1</sup>	300 <sup>1</sup>	100 <sup>1</sup>	30 <sup>1</sup>
SV 43/35/50	35	50	50	185	10 (+5/-5)	10 (+5/-5)	50	300	100	30
SV 43/35/80	35	80	50	185	10 (+5/-5)	10 (+5/-5)	50	300	100	30

**Material:** Aluminium 6060


**Color:** Aluminium

**Standard length:** 3 meters

**On order :** anodization, wood grain decorating ; other profile height

<sup>1</sup> Not for full time use (**to be approved**) - there is a risk of finish coating spalling.

**Installation:** Roughnesses of a surface on which the profile is fixed have to be eliminated by MAPEGROUT leveling solution or similar. Aluminum profiles have to be installed on both sides of a joint and are snugged by anchors, regarding the recommendations about the choice of a fixture. For simplification of installation of an insert please use WD-40 Lubricant (or an analog). Follow recommendations about installation from the brochure "Selection and installation of the Dewmark profiles. General recommendations".

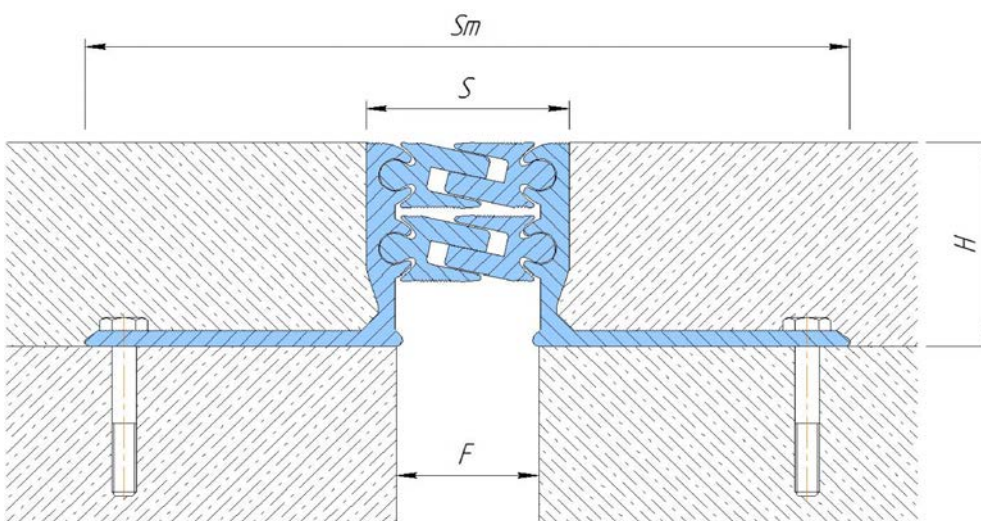

SV 43/35/50

