



DEWMARK HEAVY



SV 44/65/N

Aluminium profile - Surface fixing

- Long service lifetime
- Attractive appearance
- Joint width 65 mm
- Total Movement 14 mm
- Movement in three directions



Technical Information

Profile	Joint width, F (mm)	Installation height, H (mm)	Visible width of profile, S (mm)	Overall width of profile, Sm (mm)	Horizontal movement, ΔF (mm)	Vertical movement, ΔFh (mm)	Allowable loads, kN
SV 44/65/N	65	14	181	181	14 (+7/-7)	14 (+7/-7)	 Pedestrian
Corner version (joint along wall)							
SV-E 44/65/N	65	14	123	123	14 (+7/-7)	14 (+7/-7)	 Pedestrian

Material: Aluminium 6060


Color: Aluminium

Standard length: 3 meters

On order : Anodization, wood grain decorating

¹ To be approved

Installation: Roughnesses of a surface on which the profile is fixed have to be eliminated by MAPEGROUT leveling solution or similar. Aluminum profiles have to be installed on both sides of a joint and are snugged by anchors, regarding the recommendations about the choice of a fixture. For simplification of installation of an insert please use WD-40 lubricant (or an analog). Follow recommendations about installation from the brochure "Selection and installation of the Dewmark profiles. General recommendations".

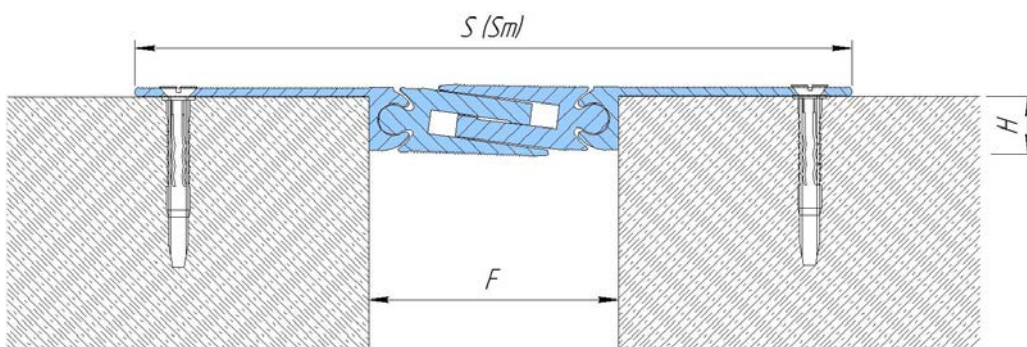

SV 44/65/N