

## WR Double 71/70/...

### Технические данные

Profile	Joint width, F (mm)	Assembling height, H (mm)	Visible width of profile, S (mm)	Overall width of profile, Sm (mm)	Horizontal deformations, AF (mm)	Vertical deformations, AFh (mm)	Allowable loads, kN			
WR Double 71/70/45	order	47	order	order	60 (+20/-40)	30 (+15/-15)	50	100	70 <sup>1</sup>	–
WR Double 71/70/55	order	57	order	order	60 (+20/-40)	30 (+15/-15)	50	100	70 <sup>1</sup>	–
WR Double 71/70/75	order	77	order	order	60 (+20/-40)	30 (+15/-15)	50	100	70 <sup>1</sup>	–

**Material:** Aluminium 6060, Plasticized PVC (with modifiers: UV and ozone resistant); stainless steel AISI 430

**Color:** black , grinded stainless steel


**Standard length:** 2,5 meters

**On order :** stainless steel AISI 304, AISI 316, AISI 409, black painted steel in RAL, decorative types of stainless steel ; different joint width

<sup>1</sup>Only for pneumatic-tire wheel loader

<sup>2</sup>Joint plate overlaying above the insert

**Installation:** Roughnesses of a surface on which the profile is fixed have to be eliminated by MAPEGROUT leveling solution or similar. Aluminum profiles have to be installed on both sides of a joint and are snugged by anchors, regarding the recommendations about the choice of a fixture. For simplification of installation of an insert please use WD-40 lubricant (or an analog). Follow recommendations about installation from the brochure "Selection and installation of the Dewmark profiles. General recommendations".

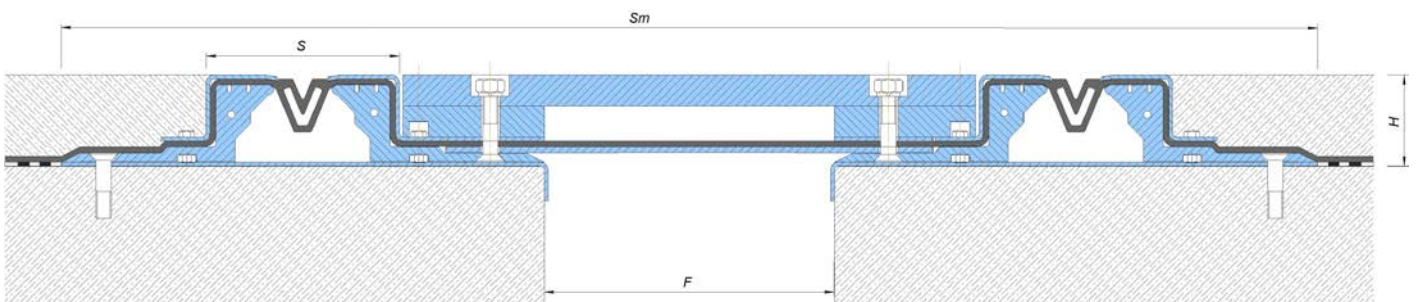

WR-H Double 71/70/150

