



DEWMARK  
STANDART

SV 14



Joint width  
15-120 mm



Top  
mounted



Movements in  
2 directions




Protection  
rating IP 30



Indoor/  
outdoor

FLOOR COVERING    TILE    LINOLEUM    POLYMER    CONCRETE

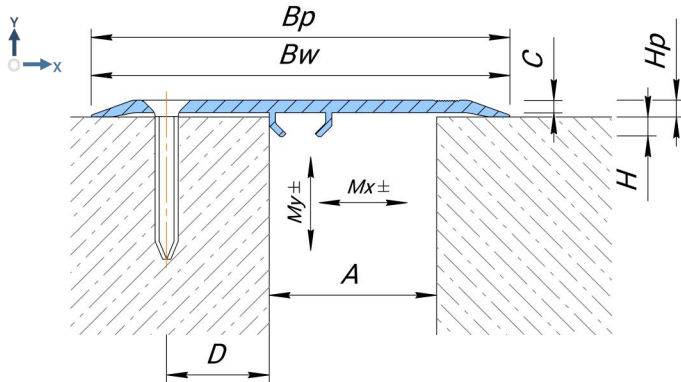

### Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

light gray    anodized aluminium

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	D (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN	
SV 14/70	15-25	70	70	5	3	1,5	15	10 (+5/-5)	- <sup>1</sup>	pedestrian	
SV 14/100	15-50	100	100	5	4	3	25	20 (+10/-10)	- <sup>1</sup>	pedestrian	
SV 14/150	15-80	150	150	5	4	3	25	30 (+15/-15)	- <sup>1</sup>	pedestrian	
SV 14/200	0-120	200	200	-	4	2,5	25	50 (+25/-25)	- <sup>1</sup>	pedestrian	
SV 14/200	0-120	200	200	-	4	2,5	25	50 (+25/-25)	- <sup>1</sup>	pedestrian	
<b>Corner versions (joint along the wall)</b>											
SV-E 14/70	15-35	60	60	5	3	1,5	-	10 (+5/-5)	- <sup>1</sup>	pedestrian	
SV-E 14/100	0-75	100	100	-	4	3	-	30 (+15/-15)	- <sup>1</sup>	pedestrian	
SV-E 14/150	0-120	150	150	-	4	2,5	-	50 (+25/-25)	- <sup>1</sup>	pedestrian	

<sup>1</sup> Movement along the Y axis is not allowed.

### On request

Painted in any RAL color  
(see website [www.ral.de](http://www.ral.de)).

Anodizing in various colors and textures  
(see page decorative anodizing or send a  
request by e-mail.)

### Corner versions

Corner profile example

