



DEWMARK
STANDART

SV 25/60

Joint width
60 mm

Recess
mounted


Movements in
6 directions

Protection
rating IP 52

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

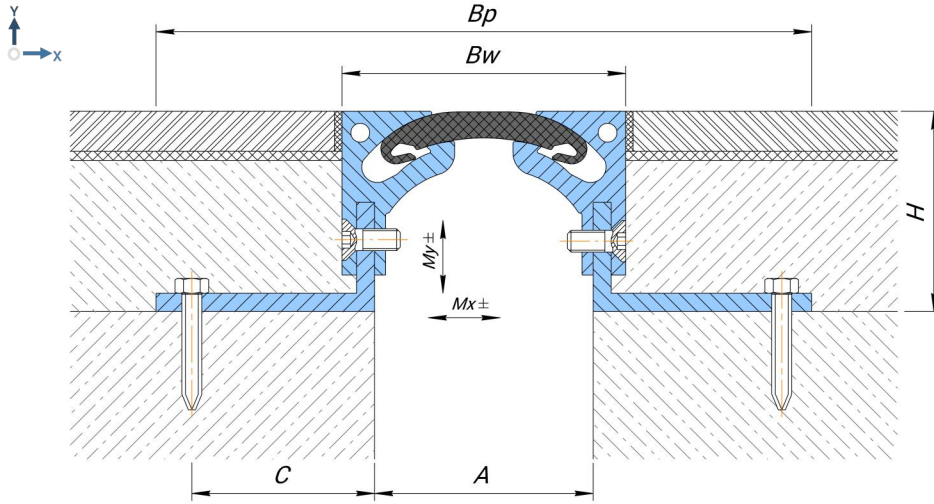

Technical data

MATERIAL

Profile: aluminium EN AW 6060T6,
Insert: PVC-P

LENGTH

3 meters

STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 25/50/H	60	78	190	from 55	55	22 (+11/-11)	10 (+5/-5)	50	100	70	20

The profile is made to the required mounting height "H" from 55 mm

On request

Profile insert can be made in any color according to RAL (see website www.ral.de).