



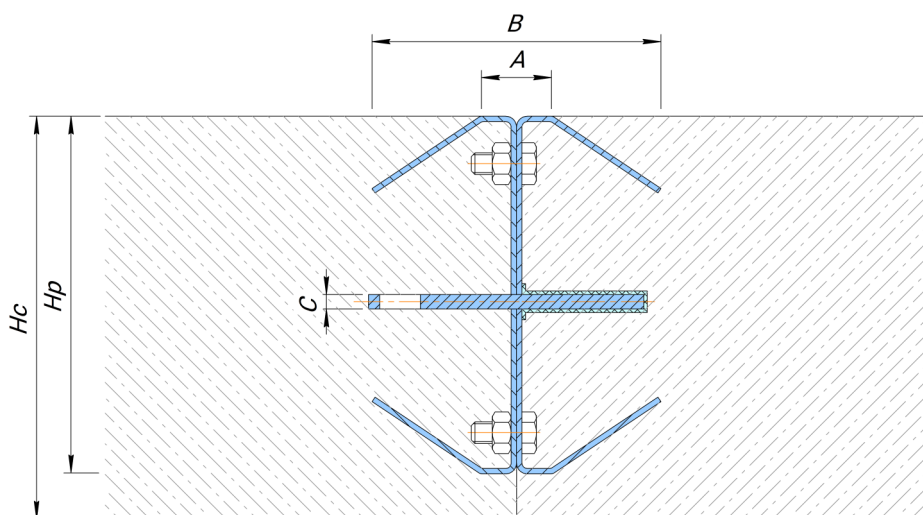

DEWMARK
CONCRETE

SG 65

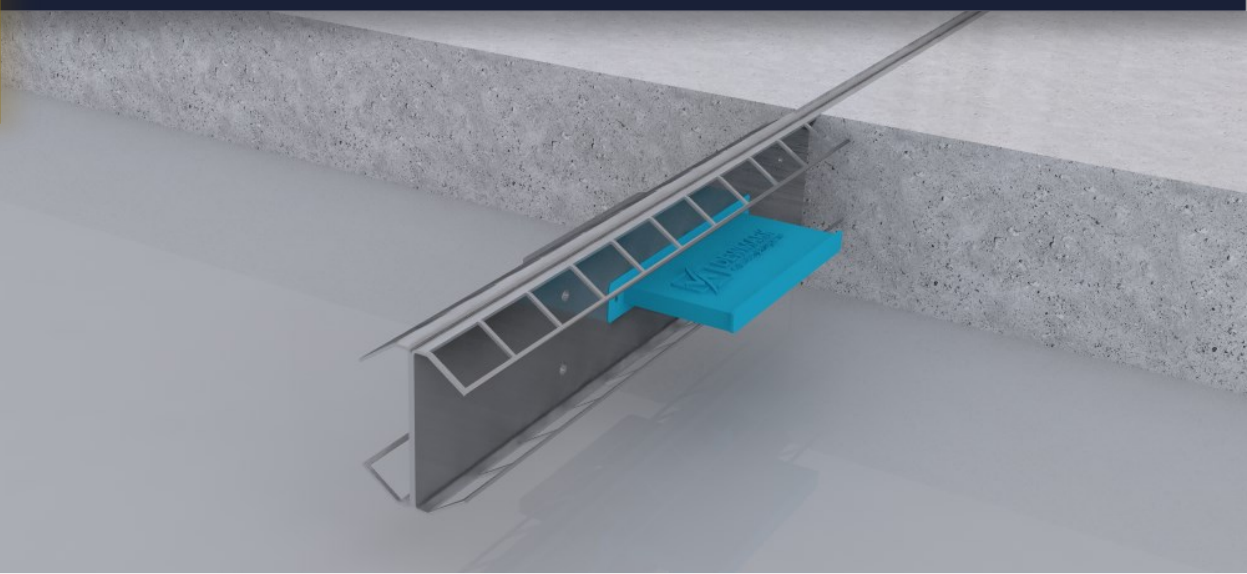

Technical details

MATERIAL
S235J2G3 , ABS plastic

LENGTH
3 meter²

COVERING
without protective coating

TREATMENT
Comes assembled

MOVEMENT
Opening of a joint on 25 mm

Profile	Hp (mm)	Hc (mm)	A (mm)	B (mm)	C (mm)	Lu (mm)	Lp (mm)	L(mm) ²	Weight/pcs ³
SG 64/90	90	100-120	10	210	8	250	— ¹	2400	20,7
SG 64/110	110	125-140	10	210	8	250	— ¹	2400	22,3
SG 64/130	130	145-160	10	210	8	250	600	2400	31,0
SG 64/150	150	165-180	10	210	8	250	600	2400	32,6
SG 64/180	180	185-210	10	210	8	250	600	2400	34,2
SG 64/210	210	215-240	10	210	8	250	600	2400	35,8
SG 64/240	240	245-270	10	210	8	250	600	2400	37,4
SG 64/270	270	275-300	10	210	8	250	600	2400	39,0

¹ For heights of 90 and 110 mm, the support plates are not fixed.

Completed on request.

² Profile weight is approximate.

On request

To order the profile can be made:

- Stainless steel AISI 304 (430);
- Hot galvanized profile.

Allowable load

Vehicle type	Allowable weight	Permissible axle load
Car	50 kN	25 kN
Truck	200 kN	50 kN
Pneumatic lift truck	50 kN	25 kN
Plastic Wheel Loader ³	—	—



DEWMARK
CONCRETE

SG 65

